

## Waterproofing tape 120mm

Catalog number: 150 600

EAN: 8606008732886



### Application

- Waterproof connection of waterproofing membranes with required overlap between membranes both indoor (kitchen, bathroom, shower) and outdoor (terraces and balconies)

### Technical information


- Material: waterproofing membrane
- Dimensions: 120x0.66x10000mm
- Weight: 444g

### Logistic information

- Package: 1 pieces
- Package dimensions: 112x112x150mm
- Package weight: 387g

### Specification

- Suitable for indoor and outdoor application
- Applied on waterproofing membrane joints
- Applied with liquid waterproof sealant

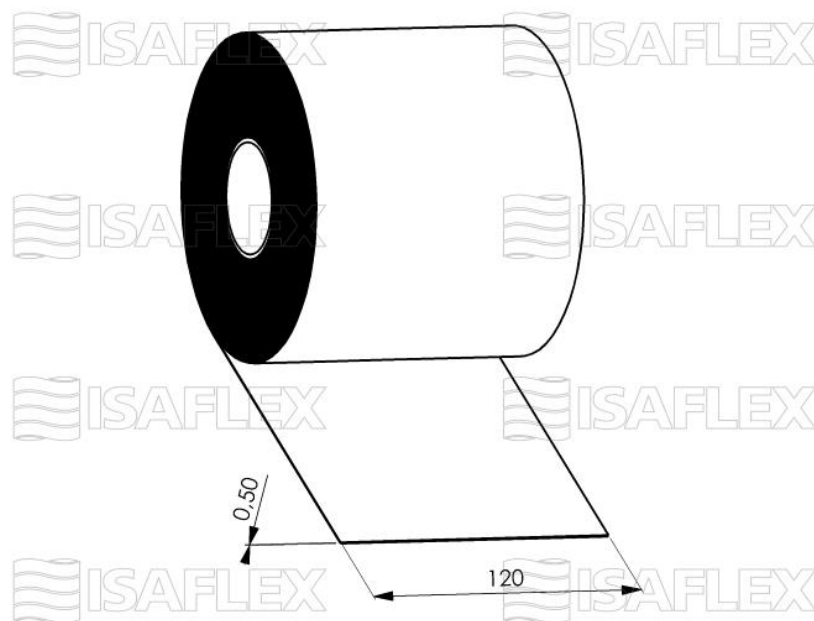

## Waterproofing tape 120mm

Catalog number: 150 600

EAN: 8606008732886

Technical Data			
Colour	Grey		
Resistance to temperature: min./max.	-30°C / +90°C		
Physical properties (approx.)	DIN	Value	Tolerance
Max. total width	Internal	120mm	±3mm
Thickness	Internal	0,66mm	±0,1mm
Total weight	Internal	364g/m <sup>2</sup>	±50g/m <sup>2</sup>
Breaking load longitudinal	DIN EN ISO 527-3	120N/15mm	≥85N/15mm
Breaking load lateral	DIN EN ISO 527-3	25N/15mm	≥15N/15mm
Extension break longitudinal	DIN EN ISO 527-3	70%	≥50%
Extension break lateral	DIN EN ISO 527-3	300%	≥200%
Resistance to water pressure	DIN EN 1928 (version B)	≥1,5bar	
UV-Resistance	DIN EN ISO 4892-3	≥500h	
Moisture vapor resistance air equivalent (sd)	DIN EN 1931	16m	≥7m
Burst pressure	Internal	2bar	≥1,5bar
Chemical Properties	Resistance after storage over 7 days by roomtemperature in following chemicals		+ = resistant 0 = weakened - = non resistant
Hydrochloric acid 3%	Internal		+
Sulphuric acid 35%	Internal		+
Citric acid 100g/l	Internal		+
Lactic acid 5%	Internal		+
Sodium hypochlorite 0,3g/l	Internal		+
Salt water (20g/l Sea water salt)	Internal		+
Potassium hydroxide 3% / 20%	Internal		+ / +
Certified according to Classification according to Storage	Certified according to DIN EN ISO 9001:2015 Made in Europe EMICODE emission class EC 1 PLUS, VOC-regulation A+ cool and dry, protect against sunlight, use within 24 months		